

HOKUYO

PL d Category3 | SIL 2 Type3

Safety Laser Scanner UAM-05LP-T301

The Smallest Size in the World
with a Versatile Range for
Safety Applications

Actual
Size



“Small and light!”



Compact and Easy to Use

The compact design for installation on AGVs, AGCs as well as in vertical guarding applications.


Size	Height 95.0×Width 80.0×Length 80.0 mm
Weight	0.8 kg
Conformity Standards	IEC61496-1/3 Type3
	IEC61508 SIL 2
	ISO13849-1 PL d Category3
	UL508
	UL1998
	UL61496-1 Type3
	CSA C22.2 No. 14

Collision Prevention



32 area patterns to accommodate the AGV travel path for collision prevention.

Presence Detection

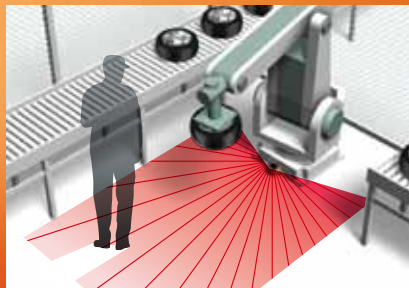

Detects humans or object entering the hazardous area.

Intrusion Detection




Detects access into critical zone. Reference boundary monitoring feature improves the safety by detecting the gaps around the protection zone and sensor's misalignment.

Expands The Range of Safety Applications


Protection over a Wide Range

Up to 5 meters of protection zone and 20 meters of warning zone configuration to suit various application requirement.

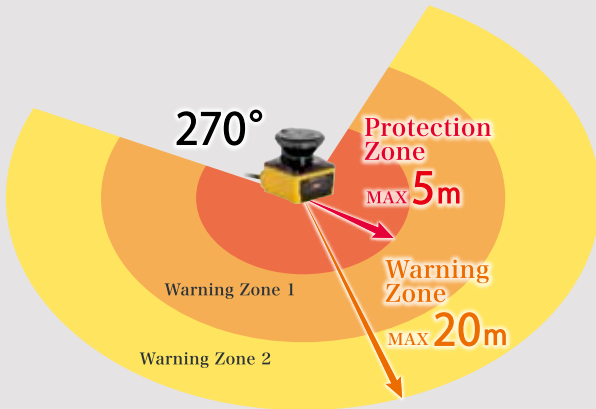

Data Output via Ethernet

Measurement data can be acquired via Ethernet with status of input/output signals and cyclic redundancy check code. Also supports command in SCIP2.0 protocol.

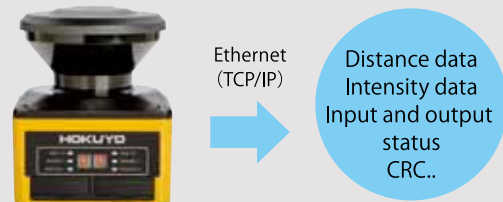

SD card for Configuration


Configuration data can be saved in a SD card which in turn can be used for configuring the UAM without connecting it to a PC. The feature is useful while replacing the UAM or configuring multiple units with the same settings.



Master-Slave Function


Maximum 4 units of UAM can be interconnected for Master-Slave operation when multiple units are required to guard the hazardous area. The system can be controlled by connecting the input and output signals to Master unit only.

Important Note: It is not possible to control the actuators via master-slave bus communication.

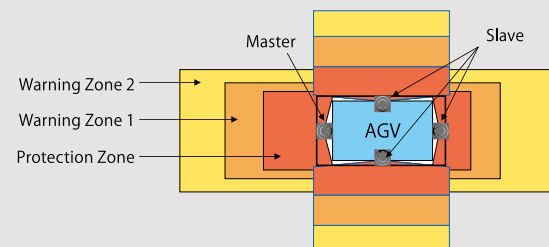


Encoder Input

In AGV applications, area is switched depending on the vehicle's speed. Speed and direction of travel provided via encoders are constantly monitored to switch the area and stop the AGV during abnormal travel.

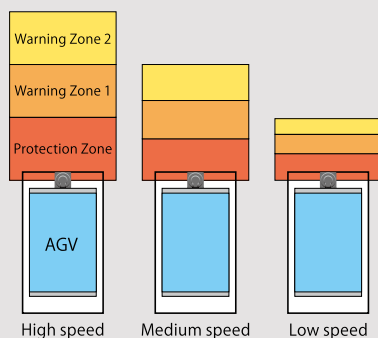

Dual Protection Mode

UAM can simultaneously protect two hazardous areas. Separate OSSD signals are triggered for the respective protection zones making it possible to guard two machines with a single UAM.

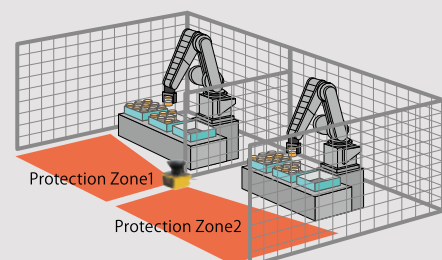


Easy Configuration of Complicated Zones


User Friendly Interface

Simple user interface to configure even a complicated zone by simultaneously viewing the measurement data. Zones can be configured with 3 different methods.

Before settings

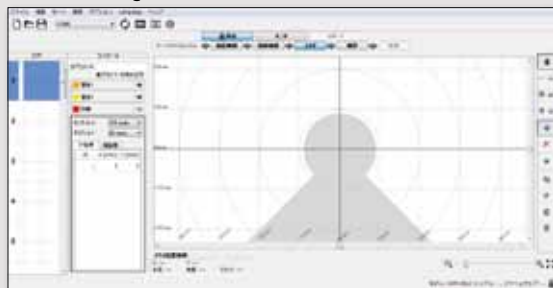

After settings

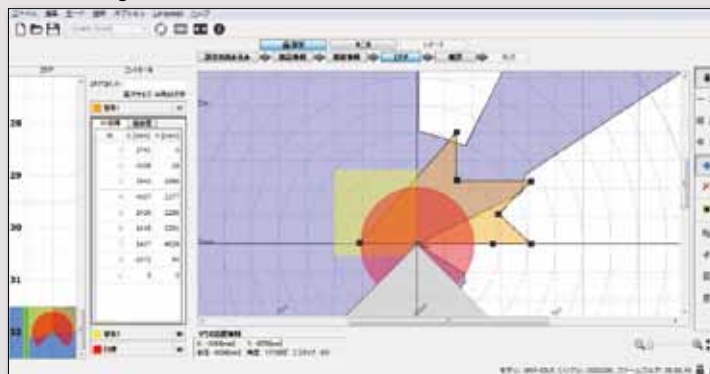

Category

Main unit

Appearance	Model number	Product code	Notes
	UAM-05LP-T301	UUAM005	CD-ROM consists of the configurator software and manual

Extension cable (Option)

Appearance	Specification	Model number	Product code	Notes
	Cable length: 10m	UAM-5C10	UZ00066	Bare cables
	Cable length: 20m	UAM-5C20	UZ00067	

USB cable (Option)

Appearance	Specification	Model number	Product code	Notes
	Micro USB Length: 1m	UAM-MUSB	UZ00065	For UAM configuration

Ethernet cable (Option)

Appearance	Specification	Model number	Product code	Notes
	Length: 3m	UAM-ENET	UZ00062	Ethernet cable is necessary for distance data output

Brackets and optical window (Option)

Appearance	Specification	Model number	Product code	Notes
	Base mounting bracket	UAM-BK03	UZ00059	
	Rear mounting bracket	UAM-BK04	UZ00060	
	Cover bracket	UAM-BK05	UZ00061	To protect the optical window
	Optical window	UAM-W002	UZ00064	For replacement when damaged and only to be fitted by approved personnel.

UAM Configurator (Option)

Appearance	Specification	Model number	Product code	Notes
	CD-ROM	UAM-CD03	UZ00063	UAM Configurator for functions and zone configuration

Specification

Subject		Specifications	
Model		UAM-05LP-T301	
Detection property	Protection Range	Max : 5m	
	Warning Range	Max : 20m (Non-safety) *1	
	Distance Tolerance *2	+100mm	
	Detection Capability	From Black-Reflector Sheet (1.8%) to Retro-Reflector Sheet	
	Detection Range	270°	
	Minimum Detectable Width	ϕ30mm (Max : 1.8m) ϕ50mm (Max : 3.0m) ϕ70mm (Max : 5.0m)	
	Scan Frequency	30ms (Rotational Speed 2000rpm)	
	Area Pattern	Max 32 patterns	
	Response Time	OFF	60ms~510ms
Optics	Element	Pulsed Laser Diode	
		Wave Length	
		905nm	
Safety	Safety Class		Laser Class 1
Type		Type 3 (IEC 61496-1, IEC 61496-3)	
Functional Safety		SIL 2 (Type B, HFT=1) (IEC61508)	
PFH _d		7.8×10 ⁻⁸ (T1=20 year) : When master slave function is not in use. 1.6×10 ⁻⁷ (T1=20 year) : When master slave function is in use.	
Housing	Size	80.0mm (W), 80.0mm (D), 95.0mm (H) (without cable)	
	Weight	0.8kg	
	Protection	IP65	
	Case Material	Body : Aluminum / Optical Window : Polycarbonate	
Connection Cable		Flying lead cable length : 3m	
Power Supply		DC 24V ±10% : when operation using converter power supply DC 24V -30%/+20% : when operation using battery	
Supply Current	Normal (without load)	6W	
	Max. (with load)	50W	
Output	OSSD1/2 (Safety)	Output type (High side SW) Output current (Max : 500 mA) *3 Leak current (Max : 1mA) AWG 26 Load tolerance (L/R=25ms, C=1μF)	
		Output type (High side SW) Output current : (Max : 250mA) *3 Leak current (Max : 1mA) AWG 28 Load tolerance (L/R=25ms, C=1μF)	
		Output type (PNP Transistor) Output current : (Max : 200mA) *3 Leak current (Max : 1mA) AWG 28	
Input	Area pattern 32 (5 Inputs x 2 Channels) EDM1/EDM2 MUTING1/MUTING2 MUTING3/MUTING4 OVERRIDE1 OVERRIDE2 RESET1/RESET2 ENC_A1/ENC_A2 ENC_B1/ENC_B2		Input Impedance 4.7 kΩ AWG 28
Interface	Configuration	USB2.0 (USB micro type-B connector)	
	Data output	Ethernet 100BASE-TX (Water proof connector)	
Environmental Resistance	Temperature	-10°C to +50°C (No freezing)	
	Storage Temperature	-25°C to +70°C (No freezing)	
	Humidity	95% RH with no condensation	
	Storage Humidity	95% RH with no condensation	
	Surrounding Intensity *4	Less than 1500lx	
Vibration	Frequency range : 10~55Hz		Sweep rate : 1 octave/min
	Amplitude : 0.35mm ±0.05mm		
Bump		Acceleration : 98m/s ² (10G)	Pulse duration : 16ms
Outdoor Operation		Not permitted	
Altitude		Below 2000m	


*1. Distance when reflectance of the object is 90% or above.

*2. Additional distance of 200 mm is needed when the UAM is working under high reflective background.

*3. Total current supply of OSSD output and Warning output should be below 1.0A.

*4. When the light sources are located at ≥5° from the detection plane of UAM.

Wiring example

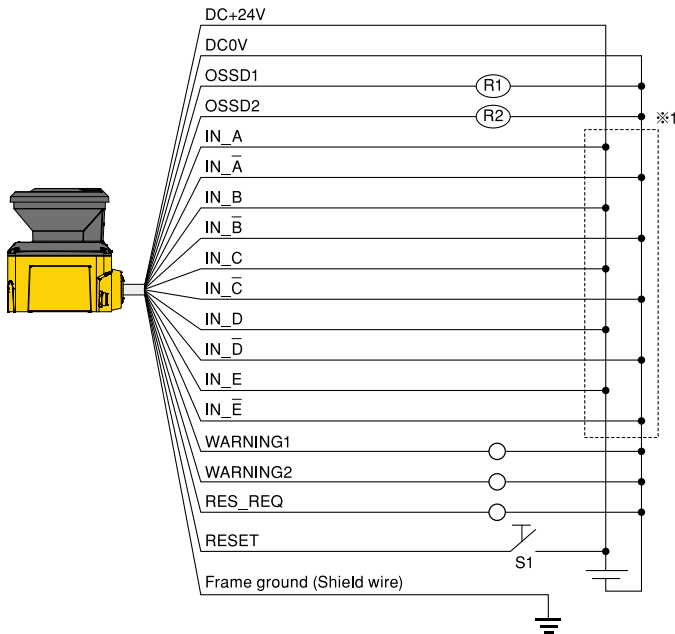

R1 and R2 : External equipment (Safety relay, Electromagnetic contactor)
S1: Interlock reset switch


*1: Refer to user's manual section 3.5 for details on area switching.

Color	Signal	Function	Description	AWG
Brown	+24V DC	Power	Power Supply : DC 24V	22
Blue	0V DC	Power	Power Supply : DC 0V	22
Red	OSSD1	Output	Protection area output 1	26
Yellow	OSSD2	Output	Protection area output 2	26
Red/Black	OSSD3/ WARNING1	Output	Protection area output 3/ Warning area output 1	28
Yellow/Black	OSSD4/ WARNING2	Output	Protection area output 4/ Warning area output 2	28
Purple	IN_A	Input	Area Switching Input A	28
Gray	IN_B/ MUTING3	Input	Area Switching Input B/ Muting input 3	28
White	IN_C/OVERRIDE1/ ENC1_A	Input	Area Switching Input C/Override input 1/Encoder input 1_A	28
Pink	IN_D/MUTING1/ ENC1_B	Input	Area Switching Input D/Muting input 1/Encoder input 1_B	28
Green	IN_E/EDM1	Input	Area Switching Input E/ External monitoring 1	28
Purple/Black	IN_A	Input	Area Switching Input A invert	28
Gray/Black	IN_B/ MUTING4	Input	Area Switching Input B invert/ Muting input 4	28
White/Black	IN_C/OVERRIDE2/ ENC2_A	Input	Area Switching Input C invert/ Override input 2/Encoder input 2_A	28
Pink/Black	IN_D/MUTING2/ ENC2_B	Input	Area Switching Input/Muting input 2/Encoder input 2_B	28
Green/Black	IN_E/EDM2	Input	Area Switching Input/Encoder input B2	28
Yellow/Green	RESET1	Input	Reset input 1	28
Yellow/Blue	RESET2	Input	Reset input 2	28
Orange	RES_REQ1/ MUT_OUT1	Output	RES_REQ 1 : Request output 1 MUT_OUT 1 : Muting state output 1	28
Orange/Black	RES_REQ2/ MUT_OUT2	Output	RES_REQ 2 : Request output 2 MUT_OUT 2 : Muting state output 2	28
White/Blue(TP)	RS485+	Communication	Communication Protocol RS485	28
White/Red(TP)	RS485-	Communication	Communication Protocol RS485	28
Shield wire	FG	—	Frame ground	—

Input/Output circuit


OSSD output circuit

OSSD/Warning output is output type.

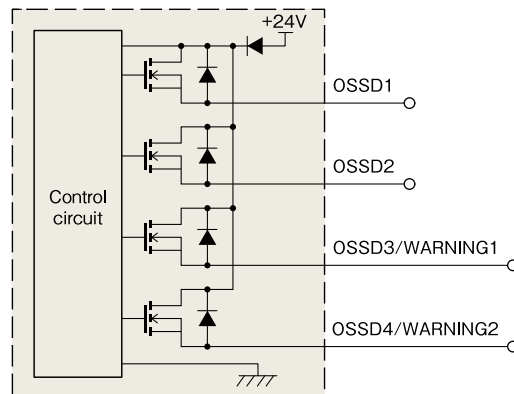


Other Output circuit

RES_REQ1, RES_REQ2, MUT_OUT1,
MUT_OUT2 output circuit.

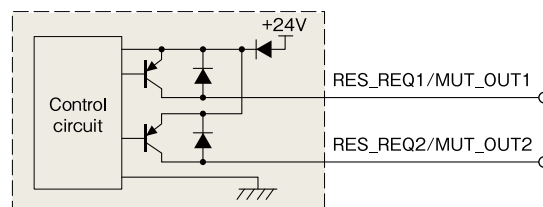


Input circuit

Area input, EDM1, EDM2, RESET1,
RESET2, MUTING1, MUTING2,
MUTING3, MUTING4, OVERRIDE1,
and OVERRIDE2

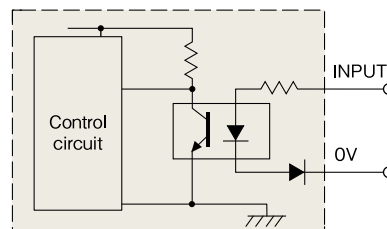


External Diagram



Sensor

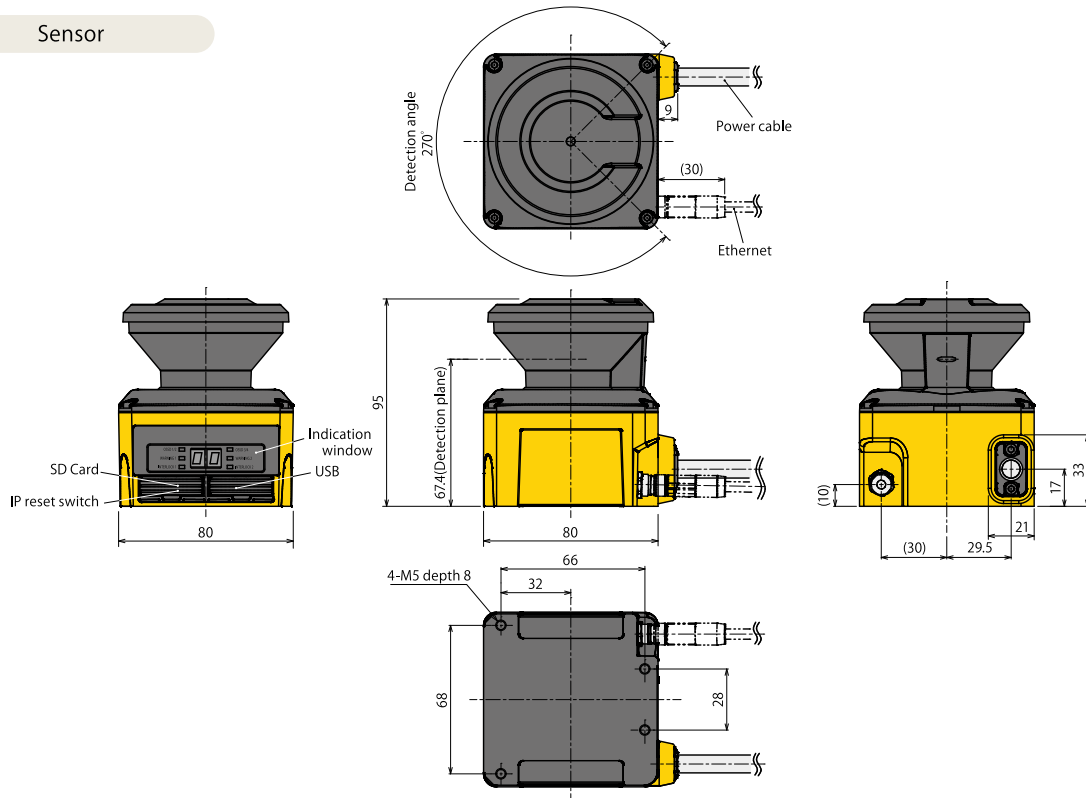

Fixed Condition of Rear mounting bracket with Cover bracket

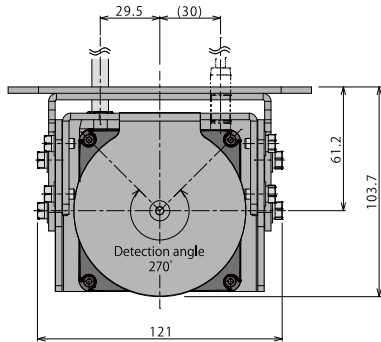

Fixed Condition of Base mounting bracket with Cover bracket

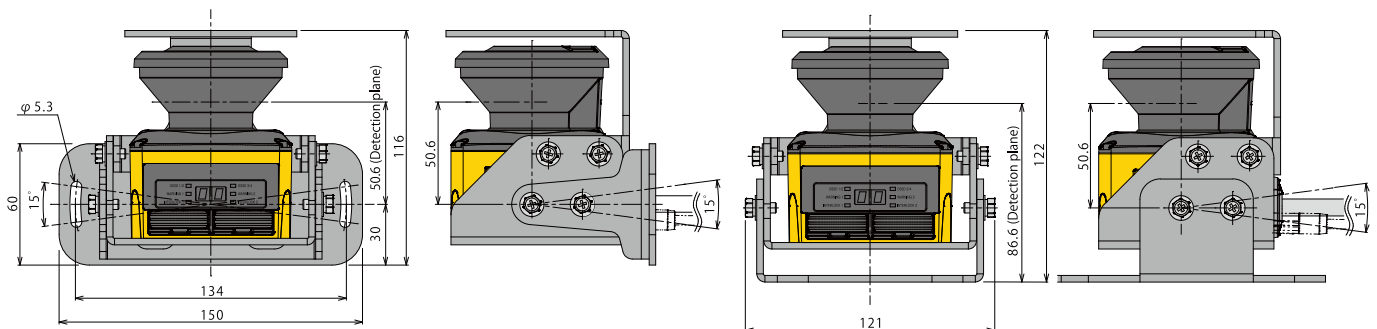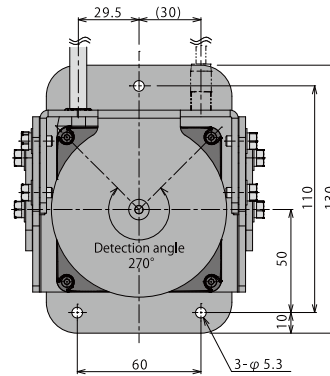



ISO14001 Certified
JQA-EM3873



ISO9001 Certified
JQA-1742



Caution for safety use

- Read instruction manual and brochure carefully before use.
- Products published in this brochure are intended to be used under certain conditions.
- For product related questions or technical issues, please contact our office.



HOKUYO AUTOMATIC CO.,LTD.

Osaka HU Building, 2-2-5 Tokiwamachi, Chuo-Ku,
Osaka, Japan. 540-0028

TEL: +81-6-6947-6333 FAX: +81-6-6947-6350

URL <http://www.hokuyo-aut.jp>

E-mail: info@hokuyo-aut.jp

- The contents of this catalog are based on material from October 2015. External dimensions and specifications may change without notice.